


## Diode and Zener Diode Characteristics

**Model : SA-103**

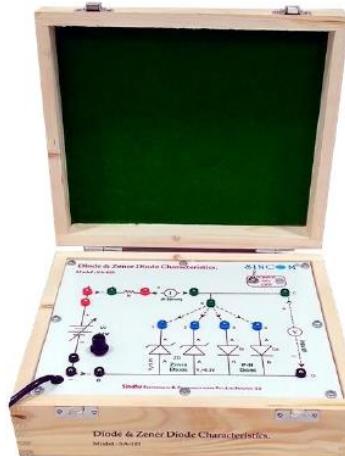

**SINCOM SA-103 Diode and Zener Diode Characteristics** is very useful to study the V-I characteristics of Silicon & Germanium types PN Junction Diodes and Zener Diode in Forward and Reverse bias modes. The Semiconductor diodes like PN Junction and Zener Diodes are a basic building of every semiconductor device which are widely used in Rectifiers, various common need circuit and voltage stabilization circuits. Hence it is necessary to study and determine the various parameters of these diodes. The trainer is simply designed to plot PN Junction Diode, Zener diode characteristics and determine its various parameters in a simple experimental way. The trainer is without meters and has the facility to connect the external analog or digital voltmeter and ammeter in the circuit.

### Features

- ❖ DO-41 Silicon and Germanium Diodes package.
- ❖ Zener Diode used is Silicon Planer Power in DO-41 package
- ❖ Silicon & Germanium PN Junction diodes and two Zener Diodes are provided
- ❖ PN Junction Diodes used are having Higher average forward current and Non-repetitive Peak forward surge current, Higher Peak repetitive Reverse voltage and Power dissipation.
- ❖ Zener Diodes used are having Low forward voltage drop and High operating Temperature range.
- ❖ In-Built Variable regulated DC Power Supply
- ❖ Multi color Circuit Diagram is screen printed on the front of the white color acrylic board
- ❖ Enclosed in an attractive, light weight, High Quality, Poly Coated Imported Pine Wooden cabinet
- ❖ Facility to connect the external Digital/ Analog Voltmeter and Ammeter
- ❖ Easy to select the different types of Diodes
- ❖ User friendly Designed
- ❖ Very Easy for Operation
- ❖ Interconnections by 2mm high quality banana sockets and pins
- ❖ Maximum Test points to explore all the corners of experiment
- ❖ 1 Year Warranty

## Technical Specifications

▪ AC Mains Power Supply	: 230 ±10%, 50Hz
▪ DC Power Supply	: IC Regulated Variable 0V to +12V / 500mA
▪ Diodes Used	: Two PN Junction Diodes and Two Zener Diodes
▪ Diode Package	: DO-41 Tape and Reel type
▪ For PN Junction Diodes	
• Diodes Used	: Silicon and Germanium PN Junction
• Reverse current	: 5µA at $T_A = 25^0\text{C}$ , 50µA at $T_A = 100^0\text{C}$
• Peak forward surge current :	30A
• Peak repetitive Reverse voltage	: 1000V
• Power dissipation	: 3W maximum.
• Total Capacitance	: 15 PF at $V_R = 4.0$ V and $F = 1.0\text{MHz}$
▪ For Zener Diodes	
• Zener Diodes Used	: Two Nos.
• Zener Voltage	: 5.6V and 6.2V ±10%
• Forward Voltage Drop	: 1.2V at $T_A = 25^0\text{C}$
• Surge current	: 810 - 730mA at $T_A = 25^0\text{C}$ ,
• Maximum Regulator current	: 162mA at $T_A = 50^0\text{C}$
• Reverse leakage current	: 10µA at $T_A = 25^0\text{C}$
• Power dissipation	: 1W maximum
• Junction Temperature	: 200 $^0\text{C}$
• Maximum Dynamic Impedance	: 700 $\Omega$ at $T_A = 25^0\text{C}$
▪ Weight	: 2.0 kg (approx)
▪ Dimensions (mm)	: L 220 x W 270 x H 110
▪ Interconnections	: 2mm Banana sockets
▪ Operating Temperature	: 0-50 $^0\text{C}$ , 80% RH

## Learning Scope

- To Plot the Forward & Reverse characteristics of Silicon and Germanium PN Junction Diodes.
- To Determine Forward static & dynamic resistance of diode at a given operating point.
- To Plot the Forward & Reverse characteristics of Zener Diodes.
- To Determine the Zener Voltage  $V_z$  from the reverse characteristics of Zener Diode.

## Other Instruments Required

SINCOM Digital Multi VI meter (DMVI) : Model DMVI-01 Range  $V_1$ -2V,  $I_1$ -2mA,  $V_2$ -20V,  $I_2$ -20mA DC

## Accessories Included

Set of Patch Cords and Details Instruction Manual